

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 02/071137 A1

- (51) International Patent Classification⁷: **G02F 1/1362** (74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/IB02/00308**
- (22) International Filing Date: **28 January 2002 (28.01.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
01200838.9 6 March 2001 (06.03.2001) EP
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors: **HUITEMA, Hjalmar, E., A.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **KUIJK, Karel, E.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (*national*): CN, JP, KR.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **DISPLAY DEVICE**

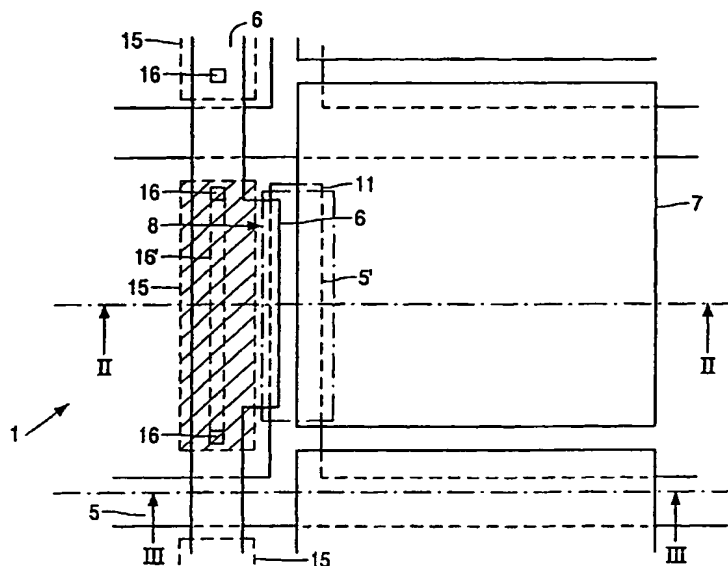

(57) Abstract: In flexible AM-LCDs using plastic TFT transistors (8), based on bottom gate, the signal distortion on the data lines (6) or selection lines (5) is reduced by adding metal strips (15, 25) per pixel, attached to said data lines (by vertical interconnections (16)), to provide a low-ohmic shunt.

WO 02/071137 A1

BEST AVAILABLE COPY

BEST AVAILABLE COPY

Display device

The invention relates to a display device comprising a flexible substrate with a matrix of pixels on the substrate, switching elements which are selectable by means of row electrodes for presenting data, which have been presented via column electrodes, to the pixels.

5 Examples of such active matrix display devices are the TFT-LCDs or AM-LCDs which are used in laptop computers and in organizers, but they also find an increasingly wider application in GSM telephones.

 The use of such display devices in "white paper" applications is also increasingly considered. The display devices then have the appearance of a newspaper. Since
10 the substrate is flexible, it can be partly or not partly folded. This flexibility also provides possibilities of applications in "wearable displays". Instead of LCDs, for example, organic or polymer LED display devices may be used alternatively.

 However, problems may occur when the substrates are often bent or bent too much. To ensure a satisfactory flexibility, a polymer material such as, for example,
15 polyaniline (PANI), polyethylene-dioxythiophene (poly-DOT), pentacene, poly(thienylene vinylene) (PTV) or poly-3-hexylthiophene (P3HT) are preferably chosen for all materials to be used, i.e. also for the materials for the column electrodes and the row electrodes, the insulating layers and the semiconductor materials.

 A drawback of the use of polyaniline (PANI) as a conducting material is its
20 high resistance; the sheet resistance is about $1,5 \cdot 10^3 \Omega/\square$ (at a layer thickness of 200 nm). If this is used for a column conductor with a width of about $25 \mu\text{m}$ and dimensions of the pixels in the direction of a column conductor of about $540 \mu\text{m}$, the resistance along each pixel is about 35 k Ω . The provision of a double layer of PANI with, for example, a metal may provide a solution, but the conventional materials adhere poorly to the PANI or are not very
25 attractive for other reasons (etching rate differences). The structuring of a metal provided on an organic layer, or PANI is not possible in practice or causes great problems.

 It is an object of the present invention to obviate this problem and to this end, the invention provides a display device with a flexible substrate, in which parts of the column electrodes are arranged parallel to mutually separate strips of a conducting material insulated

from the column electrodes, or parts of the row electrodes are arranged parallel to strips of a conducting material insulated from the row electrodes.

The invention is based on the recognition that it is possible to provide a strip of a satisfactorily conducting material parallel to the high-ohmic column electrodes or row electrodes, which strip is, as it were, already broken in a defined way. The separate parts are then arranged parallel to the high-ohmic conductors via feed-throughs.

The strips of a conducting material preferably have a dimension which, in the direction of the relevant electrode, is substantially equal to the dimension of the pixel in this direction, reduced by the width of an electrode in the direction transverse (perpendicular) thereto (at least in a matrix with transversely crossing column electrodes and row electrodes).

Since the row electrodes are usually subjected to the heaviest capacitive load, the strips of a conducting material and the row electrodes are made of the same low-ohmic material in a preferred embodiment. Since they can be manufactured (bottom-gate configuration) on one level (directly on the substrate), a metal can be used for this purpose and no extra masking step is required.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 is a diagrammatic plan view of a possible embodiment of a part of a display device according to the invention,

Fig. 2 is a diagrammatic cross-section taken on the line II-II in Fig. 1,

Fig. 3 is a diagrammatic cross-section taken on the line III-III in Fig. 1, while

Fig. 4 is a cross-section of another embodiment, and

Figs. 5 and 6 show some advantages of a display device according to the invention.

The Figures are diagrammatic and not drawn to scale. Corresponding elements are generally denoted by the same reference numerals.

Fig. 1 is a plan view and Figs. 2, 3 are cross-sections of a part of a display device according to the invention.

Fig. 1 is a plan view of a display device 1 to which the invention is applicable. It comprises a matrix of pixels, of which Fig. 1 shows a picture electrode 7 at the area of a

crossing of a row electrode, or selection electrode, 5 and a column electrode, or data electrode, 6. Fig. 1 further shows a TFT transistor 8, whose source electrode is constituted by a part of the column electrode 6, while a part of the picture electrode 7 functions as a drain and a projecting portion 5' of the row electrode functions as a gate electrode (see also the cross-section in Fig. 2).

Fig. 2 is a diagrammatic cross-section of a part of a light-modulating cell with, for example, a liquid crystal material 2, in this example PDLC (polymer-dispersed liquid crystal) which is present between two substrates 3, 4 of a flexible material such as synthetic material (for example, polyethylene). The first substrate 3 is provided with a plurality of row electrodes 5 of, for example, aluminum or another suitable metal (gold, chromium, copper), combinations of metals or a double layer of a metal layer and a conducting polymer which have a projecting portion 5' at the location of TFT transistors 8, which portion functions as a gate electrode. The gate electrode and a metal strip 15 to be further described (which is provided, for example, simultaneously with the row electrodes 5) is provided with an insulating layer 9 functioning as a gate dielectric at the location of the projecting portions 5'. For this layer, a polymer material such as, for example, polyphenyl vinol (PVP) or a photoresist is chosen. The insulating layer 9 is provided with column electrodes 6 and patterned picture electrodes 7 of, for example, polyaniline (PANI) or polyethylene-dioxythiophene (poly-DOT). A patterned layer of semiconductor material (for example, a polymer material such as pentacene, polythienylene (PTV) or poly-3-hexylthiophene (P3HT) is present at the location of the gate electrode between the column electrodes 6 and the picture electrodes. Such a layer of semiconductor material constitutes a TFT transistor 8, together with parts of a column electrode 6 and a picture electrode 7, and together with the gate electrode 5' and the intermediate insulating layer 9. A layer 10 of, for example, a photoresist is provided as a protective coating on the row and column electrodes, the picture electrodes 7 and the TFT transistors 8.

A transparent counter electrode 13 of, for example, ITO (indium tin oxide) or polyethylene-dioxythiophene (poly-DOT or pDOT) is present on the other substrate 4. In this example, the electrode 13 is provided with a color filter 12, with a black mask 12 opposite the TFT transistor 8.

To ensure a satisfactory flexibility of the display device, organic materials have been chosen as materials for the column electrodes and the picture electrodes and for the semiconductor materials and the liquid crystal material. For example, PDLC is very suitable for the liquid crystal effect. In this example, a satisfactorily conducting metal such as

Al, Au, Cr or Cu with a thickness of 200 nm is chosen for the row electrodes, so that the flexibility is ensured, while the resistance is low enough to switch on the lines fast enough.

As already stated, a metal strip 15 which is interrupted at the area of the crossings with the row electrodes 5 is also present on the first substrate 3. The separate parts of the metal strip 15 are connected in an electrically conducting manner near their ends to the column electrodes 6 via through-metallizations 16 in the insulating layer 9. In this way, "shunts" are obtained (parallel arranged satisfactorily conducting strips) which considerably reduce the effective sheet resistance of the column electrodes 6 (by a factor of about 6) to a value below $250 \Omega /$.

Fig. 4 shows another possible cross-section, in which the row electrodes (and the gate electrodes) are also provided with such shunts. In the relevant case, the separate strips 25 are separated from the ITO or metal conductor 5 by an extra insulating layer 24, but this is not strictly necessary.

Fig. 5 shows an extra advantage of providing the metallization in separate strips 15, 25, parallel to the conductor tracks 6 (5) of flexible material on a flexible substrate 3. The other (similarly flexible) parts of the display device are shown diagrammatically (reference numerals 2, 4). By dividing the conductor into discrete strips 15, the conductor will not break when the substrate is bent to a considerable curvature.

Fig. 6 shows the advantage of the metallization, parallel to the conductor tracks 6 with respect to the switching rate. Curve (a) shows the voltage at the end of the data line 6, if polyaniline (PANI) is used as a conducting material with a sheet resistance of about $1,5 \cdot 10^3 \Omega /$, a width of 25 micrometers of the electrodes and a length of 34.56 millimeters. In this example, the display device has 64 rows. The column was driven with a step function. The much faster response which is achieved in the device according to the invention, because the sheet resistance is reduced to about $0,25 \cdot 10^3 \Omega /$ with the metallization, parallel to the conductor tracks, is shown by way of curve (b). The rise time decreases from $66 \mu\text{sec}$ to $10 \mu\text{sec}$.

The invention is of course not limited to the examples described hereinbefore. For example, the through-metallizations 16 in Fig. 1 may be formed as a single through-metallization (shown by way of broken lines 16' in Fig. 1). The examples of Figs. 1 to 3 showed a liquid crystal pixel. The invention is also applicable to organic light-emitting display devices.

A combination of one or more of the above-mentioned possibilities is also applicable in practice.

The protective scope of the invention is not limited to the embodiments described.

The invention resides in each and every novel characteristic feature and each and every combination of characteristic features. Reference numerals in the claims do not
5 limit their protective scope. Use of the verb "comprise" and its conjugations does not exclude the presence of elements other than those stated in the claims. Use of the article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.

CLAIMS:

1. A display device comprising a flexible substrate with a matrix of pixels on the substrate, switching elements which are selectable by means of row electrodes for presenting data, which have been presented via column electrodes, to the pixels, wherein parts of the column electrodes are arranged parallel to mutually separate strips of a conducting material,
5 or parts of the row electrodes are arranged parallel to mutually separate strips of a conducting material.
2. A display device as claimed in claim 1, wherein parts of the column electrodes are arranged parallel to mutually separate strips of a conducting material which are
10 electrically insulated from the column electrodes, or parts of the row electrodes are arranged parallel to mutually separate strips of a conducting material which are electrically insulated from the row electrodes.
3. A display device as claimed in claim 1 or 2, wherein the strips of a conducting
15 material have a dimension which, in the direction of the column electrode, is substantially equal to the length of a pixel in the direction of the column electrode, reduced by the width of a row electrode.
4. A display device as claimed in claim 1 or 2, wherein the strips of a conducting
20 material have a dimension which, in the direction of the row electrode, is substantially equal to the length of a pixel in the direction of the row electrode, reduced by the width of a column electrode.
5. A display device as claimed in claim 1 or 2, wherein the strips of a conducting
25 material in the direction of the column electrode or in the direction of the row electrode have substantially the same pitch as the pixels in the corresponding directions.
6. A display device as claimed in claim 1 or 2, wherein the strips of a conducting material and the row electrodes are made of the same material.

7. A display device as claimed in claim 1 or 2, wherein the strips of a conducting material and the column electrodes are made of the same material.
- 5 8. A display device as claimed in claim 1 or 2, wherein the semiconductor material comprises an organic material.
9. A display device as claimed in claim 1 or 2, wherein insulating layers comprise an organic material.
- 10 10. A display device as claimed in claim 1 or 2, wherein the pixels comprise an organic material.
11. A display device as claimed in claim 9, wherein the pixels form part of a
- 15 liquid crystal material or comprise an organic luminescent material.

1/2

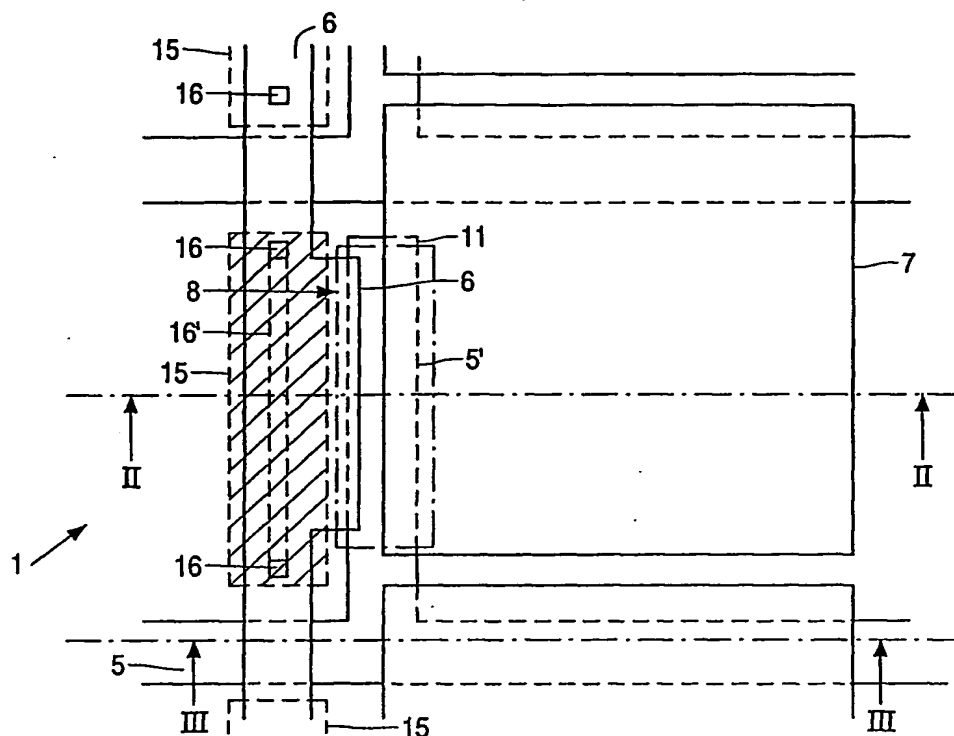


FIG. 1

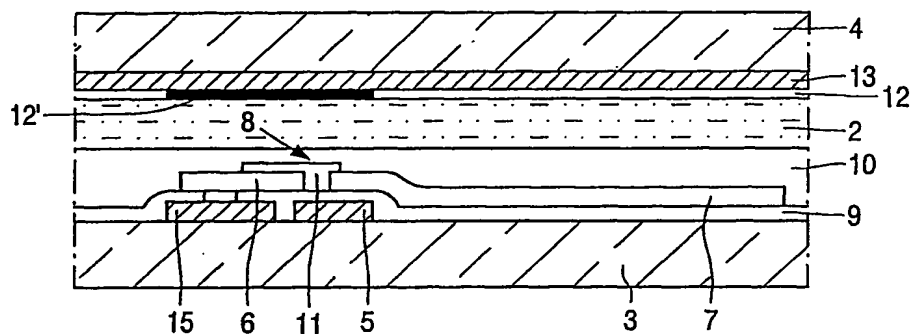


FIG. 2

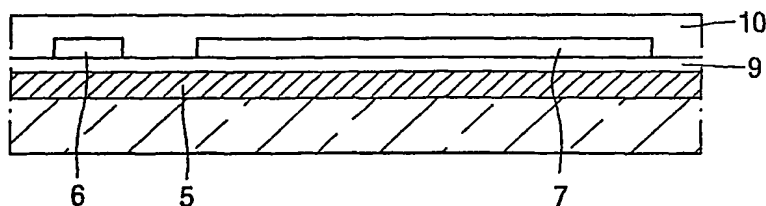


FIG. 3

2/2

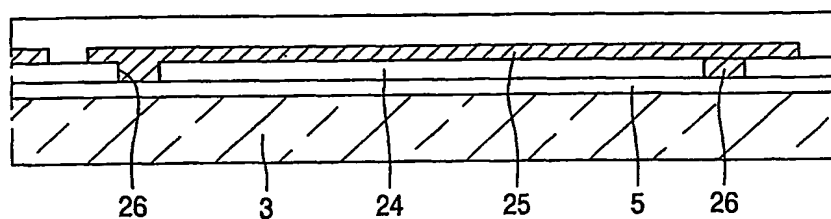


FIG. 4

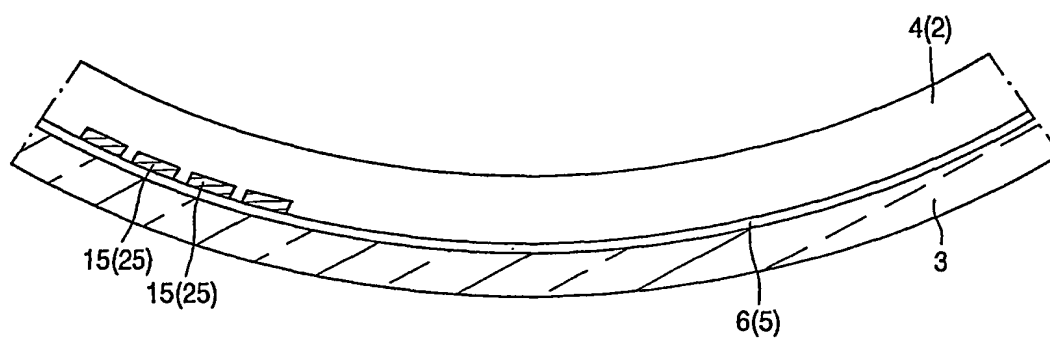


FIG. 5

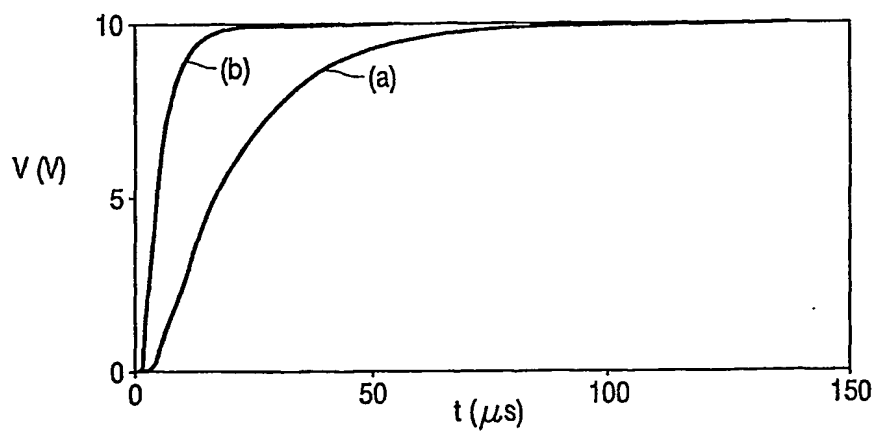


FIG. 6

INTERNATIONAL SEARCH REPORT

Inter 1st Application No

PCT/IB 02/00308

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 602F1/1362

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 602F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 025 892 A (KATAYAMA MIKIO ET AL) 15 February 2000 (2000-02-15) column 10, line 34 -column 11, line 55 figures 11-13	1-11
P, X	US 2001/019374 A1 (CHIKAMA YOSHIMASA ET AL) 6 September 2001 (2001-09-06) paragraph '0083! - paragraph '0091! figure 3	1-11

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the International search

7 May 2002

Date of mailing of the International search report

21/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Petitpierre, O

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 02/00308

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6025892	A	15-02-2000	JP	10010583 A	16-01-1998
			KR	264112 B1	16-08-2000
			TW	448332 B	01-08-2001
US 2001019374	A1	06-09-2001	JP	2001312222 A	09-11-2001

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**

This Page Blank (uspto)